Lysholm
Technologies Sweden

Twin-Screw Supercharger 2100A Dimension drawing

DISPLACEMENT 2.1 L/REV.
MAX SPEED 13000 RPM CONT.
INTERNAL LUBRICATION SYSTEM WITH
NO NEED FOR EXTERNAL OIL

DIFFERENT DRIVE LENGTHS
WITH TURNED PULLEY
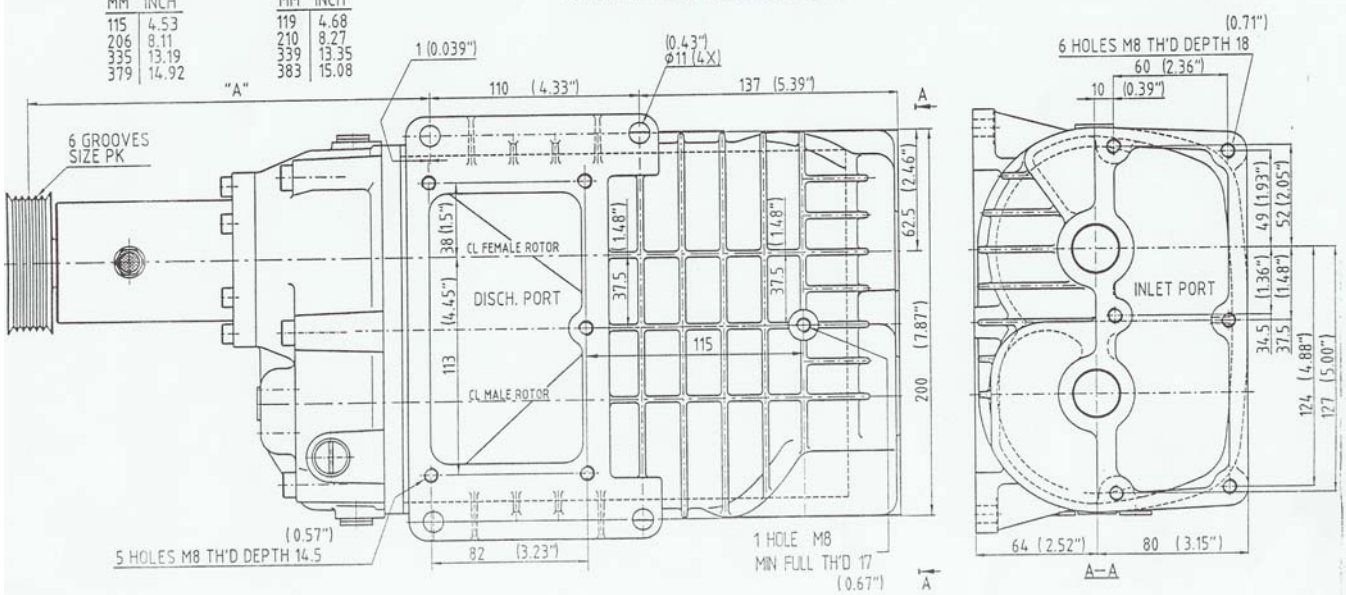
"A" MM	"A" INCH	"A" MM	"A" INCH
115	4.53	119	4.68
206	8.11	210	8.27
335	13.19	339	13.35
379	14.92	383	15.08